

Tri Spike

Surface / Soft ground spike

outdoor

La familia Tri Spike contiene 4 unidades de iluminación montadas en superficie exteriores, de las cuales se podría pensar que son luces independientes. Gracias al diseño atemporal en Tri Spike de alta calidad, se sienten muy cómodos en cualquier ambiente al aire libre y realmente se ven muy elegante en un jardín o en un paisaje.


Una exquisita luminaria de jardín LED en cuerpo de aluminio fundido a presión con reflector de aluminio recubierto al vacío

Tri Spike viene con una punta de tierra blanda o un montaje en superficie para una mejor instalación.

The Tri Spike family contains 4 outdoor surface mounted lighting units, from which you could think they are standalone lights. Thanks to the timeless design in high quality Tri Spike, they feel very comfortable in any outdoor environment and they actually look very classy in a garden or on a landscape.

An exquisite LED garden luminaire in Die cast aluminum body with vacuum coated aluminum reflector

Tri Spike comes with soft ground spike or surface mounting for preferable installation .

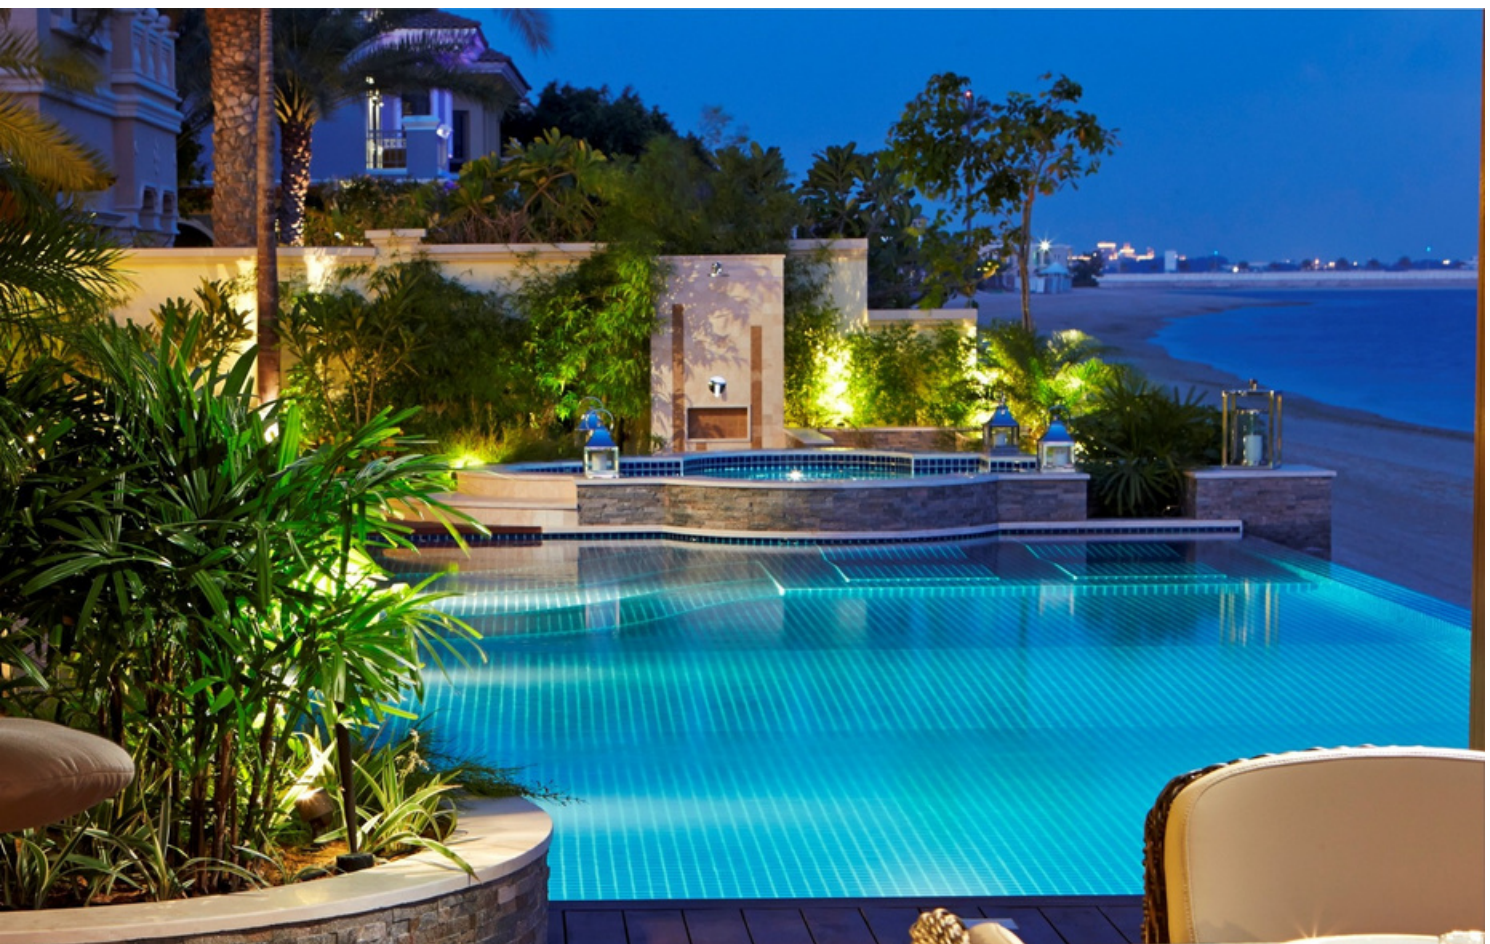

outdoor

Tri Spike

Surface mounted luminaire



Tri Spike 1R



Tri Spike 3R





Tri Spike 1S



Tri Spike1R Surface

Lamp Type COB
 Power Supply 130V-240V / 50-60Hz
 Control On / Off
 Median useful life L70B10 35,000 Hours
 Housing Body Aluminum Die-Cast
 Tempered Glass
 Installation Type Ground Spike / Surface
 Ingress protection code IP67
 Mech. impact Ik08
 Power Factor 0.9+
 Working Temperature Ta : -15°C ~ +55°C
 Protection Class IEC Safety Class I



Ordering Guide Sample Ejemplo de la guía de pedido

TriSpike	GS	3000	12	24	AC/DC	
Model		CCT	Power			Option
	InstallationType			Beam Angle		AC 220/240V
	GS Ground spike			Ángulo de haz		DC24 V
	SM Surface Mount					

Model modelo	Power energía	Color temperature CCT temperatura del color	Luminous Flux lm flujo luminoso	Beam angle deg. Ángulo de haz	Dia Ø diámetro	Height altura	Depth fondo
Trispike1R	3	30K.40K.50K.R.G.B	250	24°,45°,60°	45mm	45mm	67mm
Trispike1R	5	30K.40K.50K.R.G.B	400	24°,45°	66mm	240 mm	100mm
Trispike1R	12	30K.40K.50K.R.G.B	850	24°,45°	76mm	300 mm	110mm
Trispike3R	20	30K.40K.50K.R.G.B	1700	24°	130mm	473mm	108mm
Trispike3R	30	30K.40K.50K.R.G.B	2600	24°	189mm	405mm	93mm